

SAVE THESE INSTRUCTIONS - READ ALL INSTRUCTIONS CAREFULLY



### WARNING




#### PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION.

- To prevent personal injury or product damage only licensed electricians/personnel should install fixture.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For The installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- This product must be installed in accordance with the National Electric Code (NEC) and all applicable Federal, State/Provincial and Local Electric Codes and Safety Standards.
- All wiring connections should be capped with UL approved wire connectors.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.







#### CAUTION:

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children

### GENERAL WIRING DIAGRAM

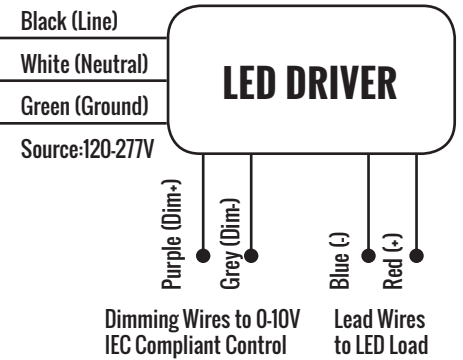

### MOUNTING INSTALLATION INSTRUCTIONS - (SAVE INSTRUCTIONS FOR FUTURE REFERENCE). RECESSED LUMINAIRES FOR TYPE IC/SUITABLE FOR DRY OR DAMP LOCATION

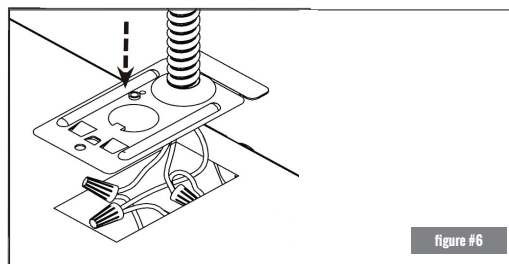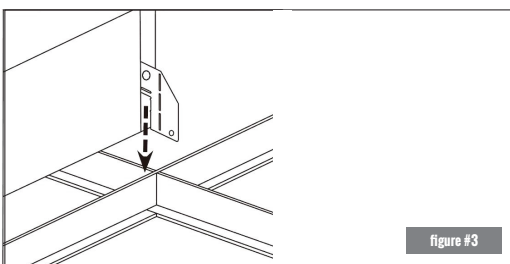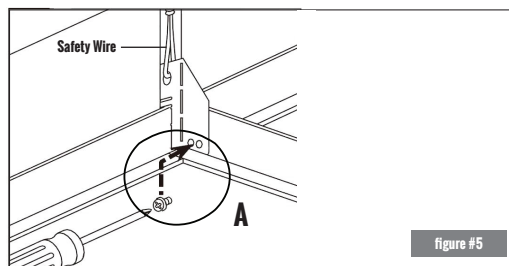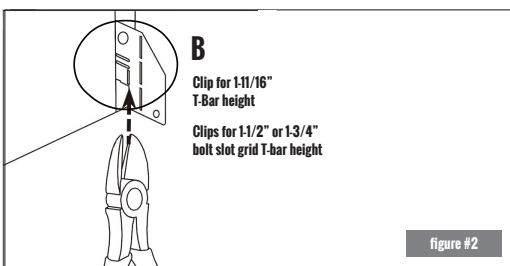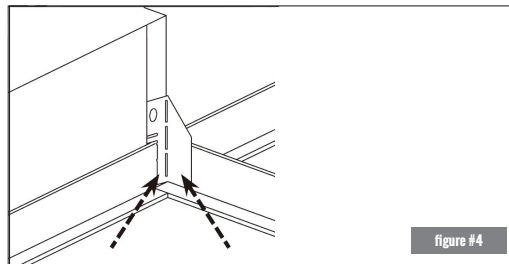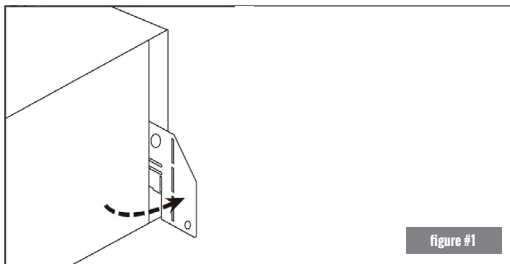

1. Bend out mounting tab 90 degrees on each corner. (Fig1)
2. Use side cutters to adjust each tab to height of T-grid. (Fig2)
3. Lay fixture into T-grid grid. (Fig3)
4. Bend tabs flush against T-grid in order to clear corner for ceiling tile. (Fig4)
5. Use a #8x1/4" sheet metal screw to fasten fixture to T-grid and use a hanger wire to tie off appropriately in accordance with local building codes (screws and hanger wires not supplied). (Fig5)
6. Ensure that the wiring of the last fixture in the row is properly terminated. Then make all electrical connections to the fixture. Attach the wiring access cover plate. (Fig6)

- Model Shown for reference only  
- (A) and (B) is optional

