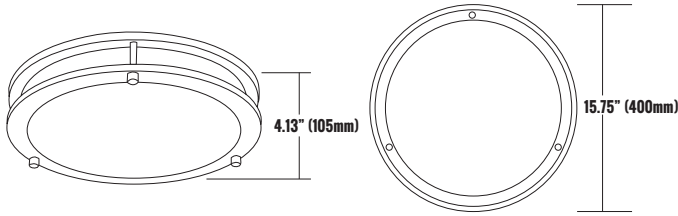


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

PRODUCT CODE: CM316-261BNPS3D
LED FLUSHMOUNT/16 INCH SPILL RING/LOW PROFILE


PRODUCT DESCRIPTION

The Etlin-Daniels CM316-261BNPS3D LED Spill-Ring Ceiling fixture offers the latest in compact design, even illumination, energy efficiency and value. This easy to install fixture features a durable polystyrene lens and is a cost-efficient solution to replace either older incandescent or compact fluorescent ceiling fixtures, or for new construction.

The Brushed Nickel accents enhance any hallway, lobby, foyer, bedroom or bathroom, and meeting room in residential, commercial, healthcare and hospitality applications. This fixture is Triac dimmable. Available in 3000K & 4000K.

FEATURES

- LED Indoor Light Source.
- Low profile 16" design.
- Durable polystyrene lens is easily removed for both installation and maintenance
- Brushed Nickel Spill-Ring accents.
- Suitable for damp locations.
- Triac dimmable.
- 5 year warranty.
- L70 - 50,000 hours.
- Energy Star certified.


PRODUCT SPECIFICATIONS (OPTICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	SYSTEM EFFICIENCY	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
SAMSUNG 2835	55 CHIPS	69LM/W	1800LM	3000K	120°	>80CRI	82%	AC120V	60HZ	82%	>0.9	20%

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
26W	STEEL/PS	>50,000 HOURS	-20°C - 45°C -4°F - 49°F	-20°C - 45°C -4°F - 49°F	15.75 x 4.13 INCHES (400 x 105 MM)	17.32 X 10.23 X 17.51 INCHES (440 X 260 X 445 MM)

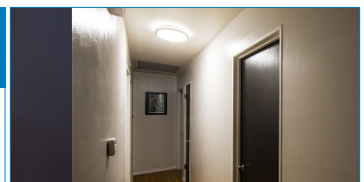

ADDITIONAL INFORMATION

INSTALLATION METHOD

FLUSH MOUNT - CEILING MOUNT

FIXTURE COLOR/DIFFUSER

BRUSHED NICKEL/POLYSTYRENE


CONTROL TYPE


TRIAC DIMMABLE

CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

PRODUCT CODE: CM316-261BNPS3D LED FLUSHMOUNT/16 INCH SPILL RING/LOW PROFILE

LUMINAIRE PHOTOMETRIC (TEST REPORT)

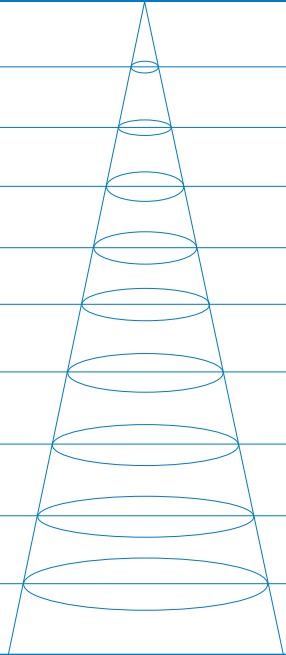ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 1532LM			
3.28FT 1M	137.9,614.9LX		11.94FT 3.64M
6.56FT 2M	34.46 / 153.7LX		23.88FT 7.28M
9.84FT 3M	15.32 / 68.32LX		35.83FT 10.92M
13.12FT 4M	8.616 / 38.43LX		47.74FT 14.55M
16.40FT 5M	5.514 / 24.60LX		59.68FT 18.19M
19.69FT 6M	3.829 / 17.08LX		71.62FT 21.83M
22.97FT 7M	2.813 / 12.55LX		83.56FT 25.47M
26.25FT 8M	2.154 / 9.608LX		95.51FT 29.11M
29.53FT 9M	1.702 / 7.591LX		107.45FT 32.75M
32.81FT 10M	1.329 / 6.149LX		119.36FT 36.38M
HT	EAVG/EMAX	ANGLE: 122.41DEG	DIA

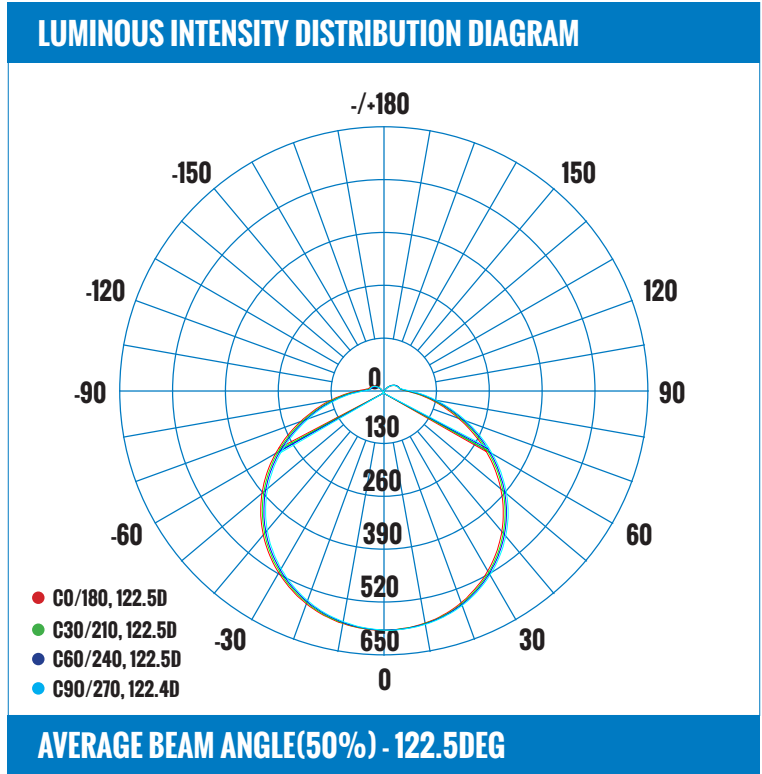

CERTIFICATIONS



DRIVER/LED CHIP



ORDERING INFORMATION - CM SERIES

SERIES	SIZE	WATTAGE	VOLTAGE	FINISH	DIFFUSER	COLOR TEMPERATURE	DIMMABLE
E.G. CM3	16	26	1	BN	PS	3	D
CM3 - CEILING MOUNT	16 - 16"	26 - 26W	1 - 120V	BN - BRUSHED NICKEL	PS - POLYSTYRENE	3 - 3000K	D - TRIAC

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com