



Panel Mount Fuseholders

Fuse Holders

Panel Mount

D2-D4

Fuse Blocks

R3-45 & S-8000 Series

D5

ETLIN DANIELS reserves the right to discontinue, modify designs and change specifications without incurring obligation. While every effort is made to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error herein.
Copyright © 2013 **ETLIN DANIELS**

PANEL MOUNT FUSEHOLDERS

D2


Panel Mount Fuseholders

Compact through the panel fuseholders are designed to fit a 1/2" hole and be serviceable from the front. Shocksafe and Touchproof. Available in two styles: low profile where there is more space behind the panel; high profile where there is little space behind the panel. They are available in bayonet or screw type knobs with either screwdriver slot head or finger grip knob. Connections are either solder or with quick connect terminals for fast assembly.

Fuse Blocks




R3-9A - Bayonet Type Cap
R3-9C - Screw Type Cap

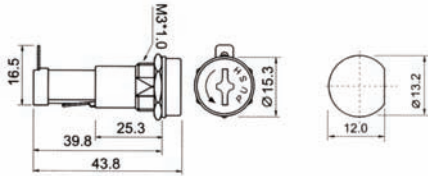

	15A 250V AC
	0.187" Quick Connect Tabs
	0.5-4.5 mm
FUSE	Ø 6.4 x 30 mm; Ø 6.35 x 31.8 mm




R3-11A - Bayonet Type Cap
R3-11B - Screw Type Cap

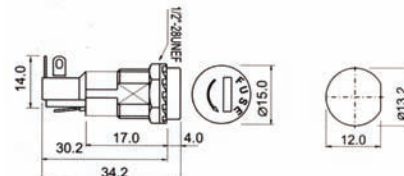

	10A 250V AC
	0.156" Solder Lugs
	4.5 mm Maximum
FUSE	Ø 5.0 x 20 mm




R3-12 - Screw Type Cap

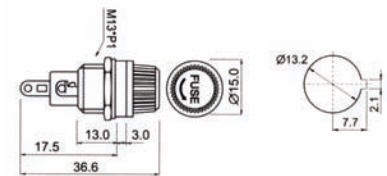

	10A 250V AC
	0.156" Solder Lugs
	4.5 mm Maximum
FUSE	Ø 5.0 x 20 mm




R3-13 - Screw Type Cap

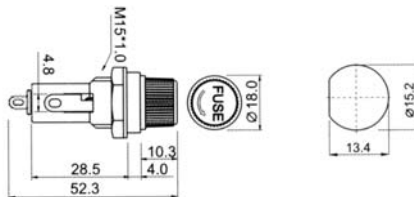

	10A 250V AC
	0.163" Lugs / 0.187" Tabs
	4.5 mm Maximum
FUSE	Ø 6.4 x 30 mm; Ø 6.35 x 31.8 mm




R3-14C - Bayonet Type Cap

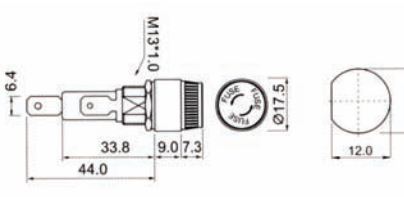

	10A 250V AC
	0.250" Male Tabs
	0.5-6.5 mm
FUSE	Ø 6.4 x 30 mm; Ø 6.35 x 31.8 mm



R3-22A - Screw Type Cap

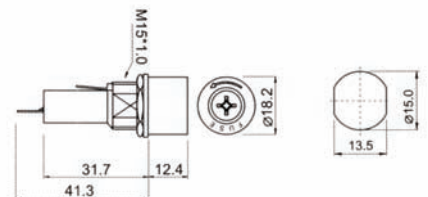

	10A 250V AC
	0.187" Quick Connect Tabs
	0.5-5.0 mm
FUSE	Ø 6.4 x 30 mm; Ø 6.35 x 31.8 mm

PANEL MOUNT FUSEHOLDERS


Panel Mount Fuseholders (cont'd)

D3

Fuse Holders




R3-28A - Bayonet Type Cap

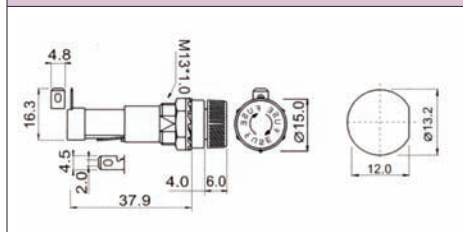

	15A 250V AC
	0.187" Quick Connect Tabs
	4.5 mm Maximum
FUSE	ø 6.0 x 30 mm; ø 6.35 x 31.8 mm




R3-28C - Screw Type Cap

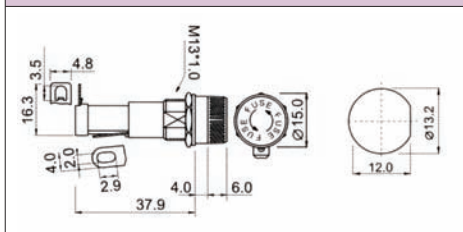


	15A 250V AC
	0.187" Quick Connect Tabs
	4.5 mm Maximum
FUSE	ø 6.0 x 30 mm; ø 6.35 x 31.8 mm




R3-44A - Bayonet Type Cap
R3-44C - Screw Type Cap

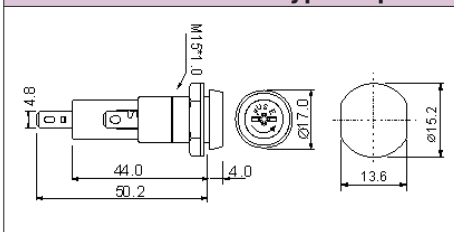

	15A 250V AC
	0.187" Quick Connect Tabs
	0.5-4.0 mm
FUSE	ø 6.0 x 30 mm; ø 6.35 x 31.8 mm

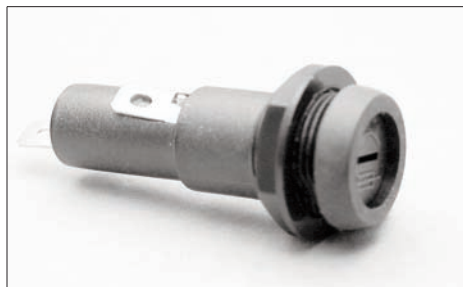


R3-44B - Bayonet Type Cap

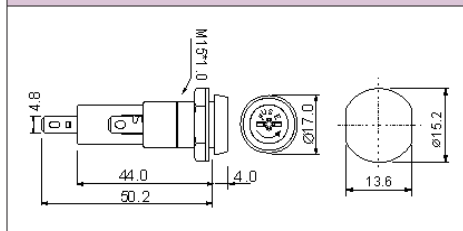

	15A 250V AC
	0.187" Quick Connect Tabs
	0.5-4.0 mm
FUSE	ø 5.0 x 20 mm Bayonet Type




R3-46A - Bayonet Type Cap
R3-46C - Screw Type Cap

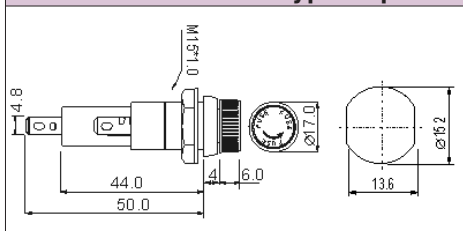

	15A 250V AC
	0.187" Quick Connect Tabs
	0.5-4.5 mm
FUSE	ø 6.4 x 30 mm; ø 6.35 x 31.8 mm



R3-46B - Bayonet Type Cap

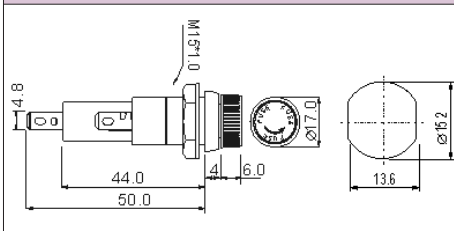

	15A 250V AC
	0.187" Quick Connect Tabs
	0.5-4.5 mm
FUSE	ø 5.0 x 20 mm

PANEL MOUNT FUSEHOLDERS


D4

Panel Mount Fuseholders (cont'd)

Fuse Holders




R3-32A - In Line Fuseholder



	15A 32VDC, 15A 250VAC
	12 AWG Wire
FUSE	ø 5.2 x 20 mm




R3-32B - In Line Fuseholder



	15A 32V DC, 15A 250V AC
	14 AWG Wire
FUSE	ø 6.0 x 30 mm; ø 6.3 x 32 mm



R3-48 - In Line Fuseholder



	5A 250V AC
	20 AWG Wire Red
FUSE	ø 5.0 x 20 mm




R3-64 - In-Line Fuseholder



	10A 250V AC
	16 AWG Wire Red
FUSE	ø 6.0 x 30.0 mm




R3-18 - Bayonet Type Cap (Heavy Duty)

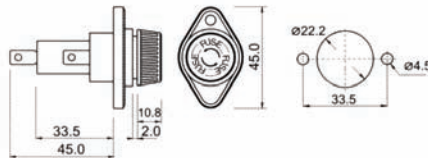

	30A 600V AC
	0.250" Quick Connect Tabs
	0.5-10.0 mm
FUSE	ø 10.3 x 38.1 mm



R3-41 - Bayonet Type Cap (Heavy Duty)

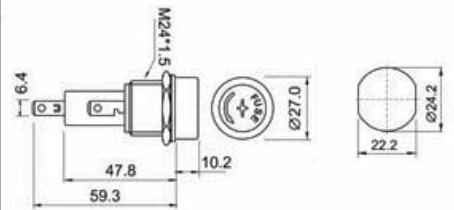


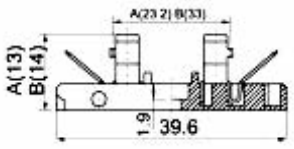
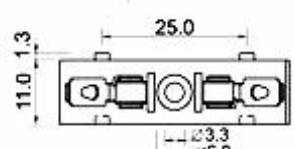


	30A 600V AC
	0.250" Quick Connect Tabs
	0.5-15.5 mm
FUSE	ø 10.3 x 38.1 mm

FUSE BLOCKS

D5

Fuse Blocks

R3-45

 <p>R3-45</p>			 15A 250V, 10A 125V AC
			 0.187" Quick Connect Tabs
			FUSE \varnothing 6.0 x 30 mm 125V \varnothing 6.35 x 31.8 mm 250V

Description

- For 1/4" x 11/4" (6.3 x 32mm) fuses
- Bolt-in and snap-in mounting available
- Tight cluster mounting
- All types of terminal configurations
- Clips made of spring-bronze
- Anti-rotational pin provided
- Flame retardant thermoplastic meets UL 94V0



Environmental Data

- Relative Temperature Index (RTI) : Bolt-in 130°C, Snap-in 110°C

Agency Information


- UL Recognized: E14853
- CSA Certified: 47235




Specifications					
Series	Terminal	UL Max	CSA Max.	Angle	Poles
S-8100	3/16" Quick Connect	CSA 20A	UL 13A	0° 40°	1-12
S-8200	1/4" Quick Connect	UL 20A	CSA 16A	0° 40° Side	

Bolt-in Mounting:


40° Terminal

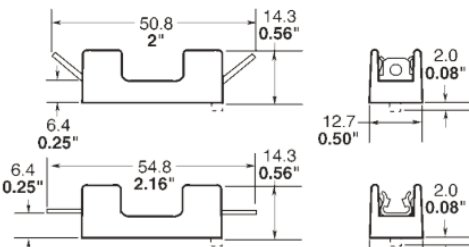

0° Terminal

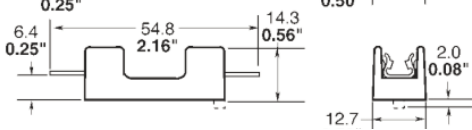


Flat Base Mounting

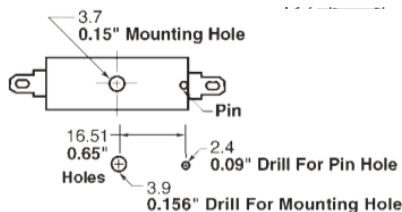


Snap-in Mounting:


40° Terminal

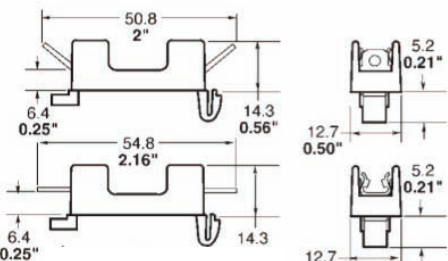


0° Terminal



Mounting



Multiple Pole



Mounting Dimensions

No. of Poles	Inches		Millimeters	
	A	B	A	B
1	-	-	-	-
2	1 1/8"	5/8"	28.6	15.9
3	1 3/4"	1 1/4"	44.4	31.8
4	2 3/8"	1 7/8"	60.3	47.6
5	3"	2 1/2"	76.2	63.5
6	3 5/8"	3 1/8"	92.1	79.4
7	4 1/4"	3 3/4"	108.0	95.2
8	4 7/8"	4 3/8"	123.8	111.1
9	5 1/2"	5"	139.7	127.0
10	6 1/8"	5 5/8"	155.6	142.9
11	6 3/4"	6 1/4"	171.4	158.8
12	7 3/8"	6 7/8"	187.3	174.6

Example: **S-8 0 01 - 1 - SNP - R**



- Series Number: S-8/
- Type Terminal: 0 = Solder
1 = 3/16" quick connect
2 = 1/4" quick connect
3 = Screw
- Terminal Angle: 01 = Straight (0°)
02 = 40° Angle
03 = Side*
- Number of Poles: (1-12)
1X = One pole, No mounting Stud
- Mounting Style: SNP = Snap-in Mounting
- RoHS Compliant Version: R